



OFF CENTER LOAD CELL TYPE SUP13

APPLICATIONS:


Off centre load cell type SUP13 can be used in small capacity weighing systems.

Some applications are:

- Small weighing platforms
- Hopper weighing, etc.

MAIN FEATURES:

- Universal use
- Low cost
- Aluminium construction
- Independent from centre of load application
- Platform size 300X400 mm

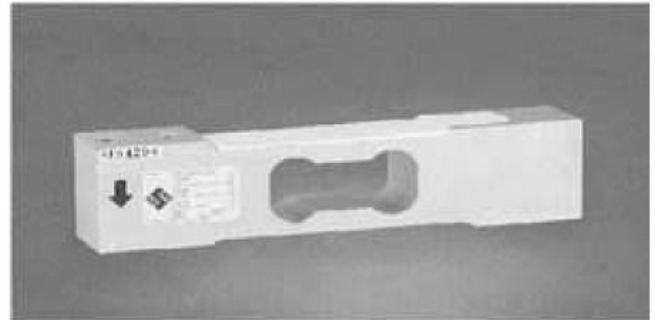

NOMINAL LOAD: kg 2-3-10-15-20-30-50-75-100

SPECIFICATION ACCORDING TO VDI/VDE 2637			
<u>METROLOGICAL CHARACTERISTICS</u>	Par.	Un.	
NOMINAL LOAD	Ln	Kg	2÷100
INITIAL LOAD	Lp	% Ln	20
MAXIMUM LOAD	Ll	% Ln	150
NON-LINEARITY	Flin	% Ln	0,015
HISTERESIS ERROR	Fu	% Ln	0,015
REPEATABILITY ERROR	Fv	% Ln	0,01
CREEP -30 MINUTES	Fcr	% Ln	0,017
NOMINAL TEMPERATURE RANGE	Btn	°C	-10+40
ZERO TEMPERATURE DRIFT (OVER 10 °C)	TK0	% Cn	0,17
OUTPUT TEMPERATURE DRIFT (OVER 10 °C)	TKC	% Cn	0,17
THERMAL GRADIENT		°K/h	<5
<u>ELECTRICAL DATA</u>			
NOMINAL OUTPUT	Cn	m V/V	2
NOMINAL OUTPUT TOLERANCE	Dc	±% Cn	10
NOMINAL SUPPLY VOLTAGE	Bsu	V	1÷10
MAXIMUM SUPPLY VOLTAGE	Usmax	V	15
INPUT RESISTANCE	Re	Ω	410±15%
OUTPUT RESISTANCE	Ra	Ω	350±3%
INSULATION RESISTANCE @ 20V	Ris	MΩ	>2000
ZERO OUTPUT TOLERANCE	Do	±% Cn	±2
<u>MECHANICAL DATA</u>			
BREAKING LOAD	Ld	% Ln	200
MAXIMUN SIDE LOAD	Llq	% Ln	100
DEFLECTION	hn	mm	<1
CABLE LENGTH		mm	1000
WEIGHT		Kg	0,2
<u>ENVIRONMENTAL CONDITIONS</u>			

CELM s.r.l.

Largo Brugnatelli 13/16 20090 BUCCINASCO (MI) ITALY

Tel: +39-0245712209 / 0257503712 Fax: +39-0245705836 / 0257506211

Internet: www.celmi.com mail: info@celmi.com